
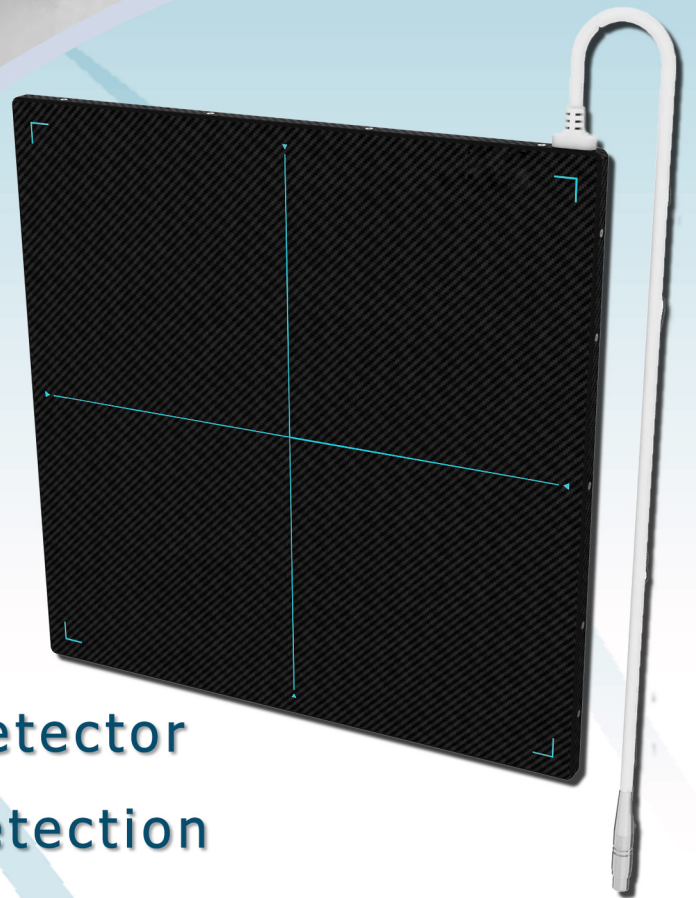


examvue DR_{17c}

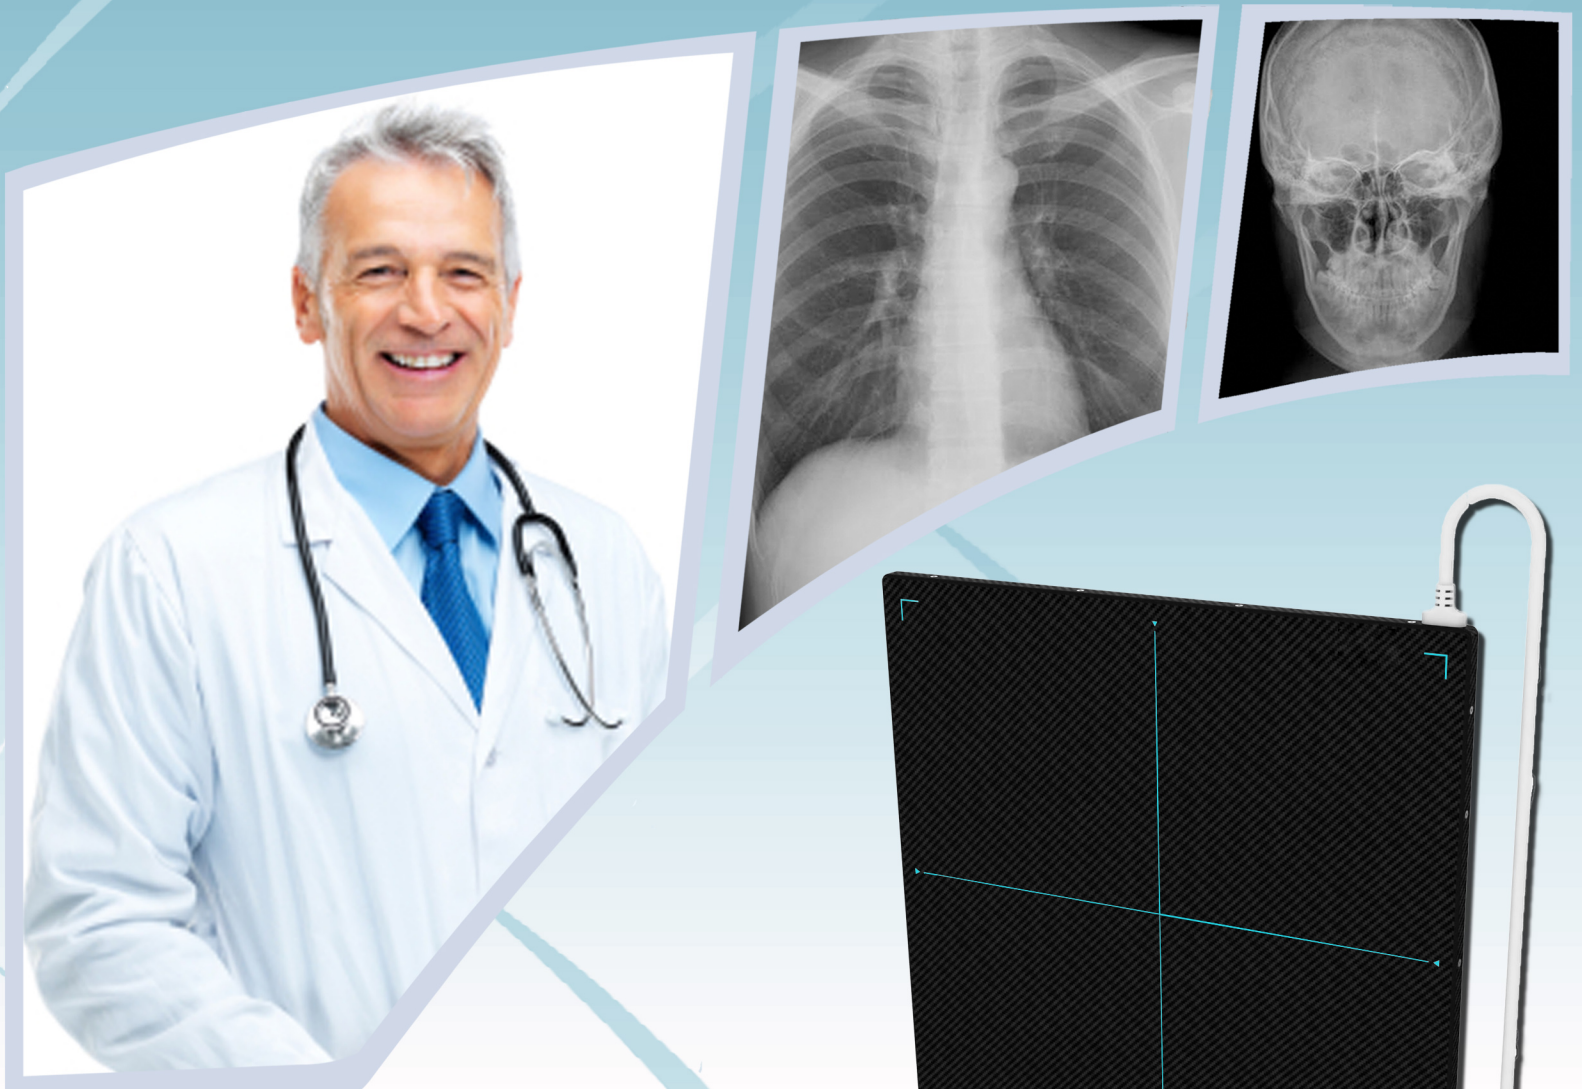

17"x17" Cassette Sized Detector
Automatic Exposure Detection
No Generator Interface
No Calibration Needed

SPECIFICATION

High DQE and the good MTF among a-Si TFT detectors

Quick acquisition of image : Gigabit Ethernet

Versatile applications (Chest position, Table position and Portable)

High flexibility : Synchronizing with all types of generators of any manufacturer


Easy to connect due to generic connector (Circular connector type)

High productivity : no rotation, high resolution and wide dynamic range (14bits)

Strong durability

Single cable connection (includes Power + Signal + over Giga Ethernet)

Application:	General Radiography
Sensor:	a-Si TFT array Flat Panel Detector
Conversion Screen:	Gadolinium
Active area:	17 x 17 inch (430 x 430 mm)
Sensor Pixel:	3,072 x 3,072
Pixel Pitch:	139 μ m
A/D Conversion:	14bits
Preview access time:	2 ~ 5 sec (approx.)
Image Capture Cycle time:	2 ~ 5 sec (approx.)
Wired Interface(Data Output):	Gigabit
Auto Trigger:	Auto X-ray sensor
Voltage:	AC 100-240V, 50/60Hz
Environment Storage:	-10 ~ 60°C, 10~90%RH (Non-condensing)
Operation:	10~35°C, 20~75% RH (Non-condensing)
Dimensions:	(W x L x H) 460 x 460 x 15mm (Cassette-Sized for the standard table or wall bucky)
Weight:	3.8kg , 8.4lb

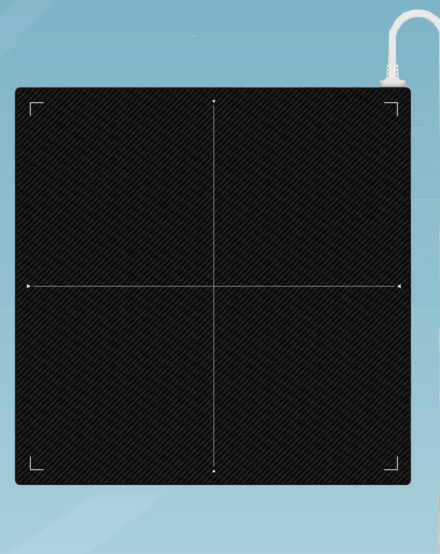

Side View

All specifications are minimum

Workstation & Monitor

Windows 7 Professional 32 Bit

Intel Processor

500 GB

4GB RAM

16X CD/DVD +/- RW

Integrated 1 Gbit Ethernet

Remote support software installed

21.5" LED monitor

Ultra Sharp 24" IPS (optional)

*JPI Reserves the right to change specification without notice

Available with:



JPI Healthcare Solutions Inc.
52 Newtown Plaza Plainview NY 11803
Toll Free: 888-574-2001
Tel: 516-513-1330
Fax: 516-513-1331
www.jpihealthcare.com

Authorized Dealer